


Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at www.gazco.com

Huntingdon 40 Gas and Electric

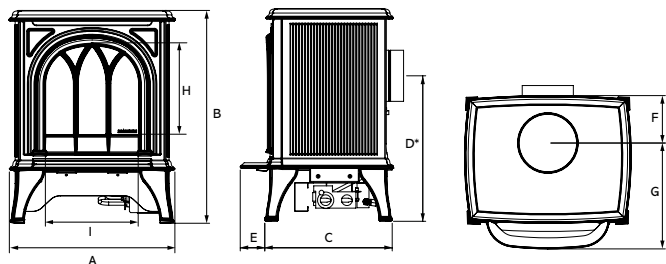

Recommended clearances between stove and other surfaces: top 9" (225mm), sides 6" (150mm), rear must be a minimum of 2" (50mm).

*Huntingdon 20 Balanced Flue is Rear Exit only.

Dimensions (mm)	A	B	C	D	E	F	G	H	I	Weight
Huntingdon 40 Gas (CF)	641	653	382	460	99	154	350	265	402	71kg
Huntingdon 40 Gas (BF)	641	653	382	510	99	183	321	265	402	75kg
Huntingdon 40 Electric	641	653	397	-	99	-	-	265	402	59.5kg

Remote Controls for Gas Huntingdon 40

Product Code

Standard Upgradeable Remote Control	8455
Programmable Thermostatic Upgradeable Remote Control	8456

Stove Flue Pipe and Collars

1' Straight pipe, Matt Black	4500
2' Straight pipe, Matt Black	4501
3' Straight pipe, Matt Black	4502
90° long 'elbow' adaptor (9" projection), Matt Black	4514
1' Straight pipe, Ivory	4500IV
2' Straight pipe, Ivory	4501IV
3' Straight pipe, Ivory	4502IV
1' Straight pipe, Matt Ivory	4500PI
2' Straight pipe, Matt Ivory	4501PI
3' Straight pipe, Matt Ivory	4502PI
Matt Black Flue collar, Conventional Flue, Huntingdon	999-010
Matt Black Flue collar, Balanced Flue, Huntingdon	999-347
Ivory Enamel Flue collar, Conventional Flue, Huntingdon	999-266
Ivory Enamel Flue collar, Balanced Flue, Huntingdon	999-507
Matt Ivory Flue collar, Conventional Flue, Huntingdon	999-456
Matt Ivory Flue collar, Balanced Flue, Huntingdon	999-683

Stove Flue Pipe Balanced flue versions of the Gas Huntingdon 40 must only use the 6" stainless steel flue provided. For additional Matt Black, Matt Ivory and Ivory enamelled flue collars, please see the Gazco Stoves price list. Gazco recommends the use of 5" Matt Black enamelled stove pipe with the conventional flue version.

Gas & Electric Huntingdon 40 Tracery Door

Product Code	Colour	Door Style	Flue Type	Fuel Type	Heat Input	Heat Output	Efficiency	Energy Efficiency Class
⊗ 515-161	Matt Black	Tracery	Conventional	Nat Gas	6.60kW	4.60kW	78%	E
⊗ 515-565	Matt Black	Tracery	Conventional	LPG	6.70kW	4.80kW	78%	E
⊗ 515-170	Ivory	Tracery	Conventional	Nat Gas	6.60kW	4.60kW	78%	E
⊗ 515-574	Ivory	Tracery	Conventional	LPG	6.70kW	4.80kW	78%	E
⊗ 515-179	Matt Ivory	Tracery	Conventional	Nat Gas	6.60kW	4.60kW	78%	E
⊗ 515-583	Matt Ivory	Tracery	Conventional	LPG	6.70kW	4.80kW	78%	E
⊗ 515-224	Matt Black	Tracery	Balanced	Nat Gas	6.60kW	5.40kW	90.8%	B#
⊗ 515-628	Matt Black	Tracery	Balanced	LPG	6.60kW	5.50kW	90.8%	B#
⊗ 515-233	Ivory	Tracery	Balanced	Nat Gas	6.60kW	5.40kW	90.8%	B#
⊗ 515-646	Ivory	Tracery	Balanced	LPG	6.60kW	5.50kW	90.8%	B#
⊗ 515-242	Matt Ivory	Tracery	Balanced	Nat Gas	6.60kW	5.40kW	90.8%	B#
⊗ 515-655	Matt Ivory	Tracery	Balanced	LPG	6.60kW	5.50kW	90.8%	B#
⊗ 615-302	Matt Black	Tracery	-	Electric	-	2.00kW	-	-
⊗ 615-613	Ivory	Tracery	-	Electric	-	2.00kW	-	-
⊗ 615-662	Matt Ivory	Tracery	-	Electric	-	2.00kW	-	-

Gas & Electric Huntingdon 40 Clear Door

⊗ 515-188	Matt Black	Clear	Conventional	Nat Gas	6.60kW	4.60kW	78%	E
⊗ 515-592	Matt Black	Clear	Conventional	LPG	6.70kW	4.80kW	78%	E
⊗ 515-197	Ivory	Clear	Conventional	Nat Gas	6.60kW	4.60kW	78%	E
⊗ 515-601	Ivory	Clear	Conventional	LPG	6.70kW	4.80kW	78%	E
⊗ 515-206	Matt Ivory	Clear	Conventional	Nat Gas	6.60kW	4.60kW	78%	E
⊗ 515-619	Matt Ivory	Clear	Conventional	LPG	6.70kW	4.80kW	78%	E
⊗ 515-251	Matt Black	Clear	Balanced	Nat Gas	6.60kW	5.40kW	90.8%	B#
⊗ 515-673	Matt Black	Clear	Balanced	LPG	6.60kW	5.50kW	90.8%	B#
⊗ 515-269	Ivory	Clear	Balanced	Nat Gas	6.60kW	5.40kW	90.8%	B#
⊗ 515-682	Ivory	Clear	Balanced	LPG	6.60kW	5.50kW	90.8%	B#
⊗ 515-278	Matt Ivory	Clear	Balanced	Nat Gas	6.60kW	5.40kW	90.8%	B#
⊗ 515-691	Matt Ivory	Clear	Balanced	LPG	6.60kW	5.50kW	90.8%	B#
⊗ 615-123	Matt Black	Clear	-	Electric	-	2.00kW	-	-
⊗ 615-157	Ivory	Clear	-	Electric	-	2.00kW	-	-
⊗ 615-222	Matt Ivory	Clear	-	Electric	-	2.00kW	-	-

When upgraded with a Programmable Thermostatic Control (8456)