


# Technical Information

The below information is to assist in your choice of a suitable Gazco stove. This is not intended to be all the information required to install your stove. This can be obtained from your local Gazco retailer or you can download the full installation instructions at [www.gazco.com](http://www.gazco.com)

## Vision Gas and Electric

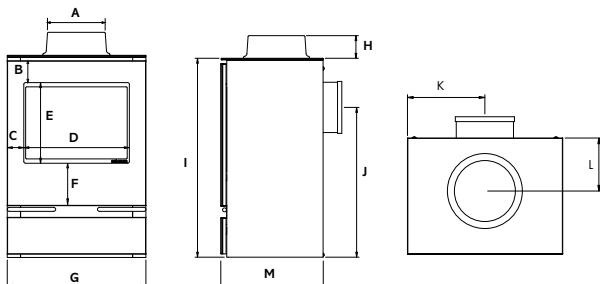

Recommended clearances between stove and other surfaces: top 225mm, sides 150mm and rear 50mm.

**Stove Benches** Vision stoves can also be placed on one of our stove benches. Please see page 78 for further information.

\* Small balanced flue models are rear flue exit only

### Dimensions (mm)

	A	B	C	D	E	F	G	H	I	J	K	L	M	Weight
<b>Small Gas (CF)</b>	143	57	58	254	240	122	370	43	529	359	185	97	289	33kg
<b>Small Gas (BF)*</b>	-	57	58	254	240	122	370	-	529	379	185	-	289	33kg
<b>Midi Gas (CF)</b>	143	65	50	316	241	127	415	43	605	436	208	96	311	39kg
<b>Midi Gas (BF)</b>	173	65	50	316	241	127	415	69	605	456	208	142	311	41kg
<b>Medium Gas (CF)</b>	143	77	64	408	274	150	535	43	677	487	268	100	353	45kg
<b>Medium Gas (BF)</b>	173	77	64	408	274	150	535	69	677	538	268	139	353	55kg
<b>Small Electric</b>	-	57	58	254	240	122	370	-	555	-	-	-	299	24kg
<b>Midi Electric</b>	-	65	50	316	241	127	415	-	604	-	-	-	320	28kg
<b>Medium Electric</b>	-	77	64	408	274	152	535	-	676	-	-	-	363	38kg

### Remote Controls

	Product Code
Standard Upgradeable Remote Control	<b>8455</b>
Programmable Thermostatic Upgradeable Remote Control	<b>8456</b>

### Stove Flue Pipe

1' Straight pipe, Matt Black	<b>4500</b>
2' Straight pipe, Matt Black	<b>4501</b>
3' Straight pipe, Matt Black	<b>4502</b>
90° long 'elbow' adaptor (9" projection), Matt Black	<b>4514</b>

**Stove Flue Pipe** Balanced flue versions of the Gas Visions must only use the 6" stainless steel or anthracite flue pipe. For the conventional flue version of the Gas Vision Gazco recommends the use of 5" matt black or gloss enamelled stove pipe.

Product Code	Model	Flue Type	Fuel Type	Flue Exit	Heat Input (kW)	Heat Output (kW)	Efficiency	Energy Efficiency Class
⊗ <b>526-013</b>	Small	Conventional	Nat. Gas	Rear	3.30	2.30	76%	E
⊗ <b>526-643</b>	Small	Conventional	LPG	Rear	3.20	2.20	76%	E
⊗ <b>526-021</b>	Small	Conventional	Nat Gas	Top	3.30	2.30	76%	E
⊗ <b>526-656</b>	Small	Conventional	LPG	Top	3.20	2.20	76%	E
⊗ <b>526-046</b>	Small	Balanced	Nat. Gas	Rear	3.20	2.50	85.1%	C#
⊗ <b>526-405</b>	Small	Balanced	LPG	Rear	3.10	2.40	85.1%	C#

### Gas Vision Midi

⊗ <b>526-065</b>	Midi	Conventional	Nat.Gas	Rear	4.55	3.10	75%	E
⊗ <b>526-417</b>	Midi	Conventional	LPG	Rear	4.35	3.00	75%	E
⊗ <b>526-077</b>	Midi	Conventional	Nat.Gas	Top	4.55	3.10	75%	E
⊗ <b>526-440</b>	Midi	Conventional	LPG	Top	4.35	3.00	75%	E
⊗ <b>526-100</b>	Midi	Balanced	Nat. Gas	Rear	4.30	3.70	95.4%	A#
⊗ <b>526-471</b>	Midi	Balanced	LPG	Rear	4.30	3.80	95.4%	A#
⊗ <b>526-109</b>	Midi	Balanced	Nat. Gas	Top	4.30	3.70	95.4%	A#
⊗ <b>526-486</b>	Midi	Balanced	LPG	Top	4.30	3.80	95.4%	A#

### Gas Vision Medium

⊗ <b>526-122</b>	Medium	Conventional	Nat.Gas	Rear	6.60	4.60	78%	E
⊗ <b>526-515</b>	Medium	Conventional	LPG	Rear	6.70	4.80	78%	E
⊗ <b>526-137</b>	Medium	Conventional	Nat.Gas	Top	6.60	4.60	78%	E
⊗ <b>526-539</b>	Medium	Conventional	LPG	Top	6.70	4.80	78%	E
⊗ <b>526-155</b>	Medium	Balanced	Nat. Gas	Rear	6.60	5.40	90.8%	B#
⊗ <b>526-580</b>	Medium	Balanced	LPG	Rear	6.60	5.50	90.8%	B#
⊗ <b>526-176</b>	Medium	Balanced	Nat Gas	Top	6.60	5.40	90.8%	B#
⊗ <b>526-612</b>	Medium	Balanced	LPG	Top	6.60	5.50	90.8%	B#

### Electric Vision

⊗ <b>634-808</b>	Small	-	Electric	-	-	2.00	-	-
⊗ <b>634-846</b>	Midi	-	Electric	-	-	2.00	-	-
⊗ <b>634-889</b>	Medium	-	Electric	-	-	2.00	-	-

# When upgraded with a Programmable Thermostatic Control (8456)